

# PERGO®

ORIGINAL LAMINATE

FLOORS  
FOR  
REAL LIFE

for partners & professionals

2019

# 3 quality levels: tough, tougher, toughest!



living **Expression**



original **Excellence**



public **Extreme**\*

**Superior durability**  
for all-round domestic use

- » Class 23/32
- » TitanX™
- » PerfectFold™ 3.0
- » Fire Class C<sub>fl</sub>-s1
- » **25 year guarantee\***

**Outstanding durability**  
for the tough demands  
of everyday life

- » Class 23/33
- » TitanX™
- » PerfectFold™ 3.0
- » Fire Class B<sub>fl</sub>-s1/C<sub>fl</sub>-s1
- » **Lifetime guarantee\***


**Extreme durability**  
for high-wear and public areas

- » Class 34
- » TitanX™
- » PerfectFold™ 3.0
- » Fire Class B<sub>fl</sub>-s1
- » **Lifetime guarantee\***


\* guarantee for commercial use on request




- 1 Superior wear and scratch resistance layer
- 2 Crystal clear decor
- 3 Special impact layers
- 4 Moisture resistant HDF core
- 5 Back stabiliser

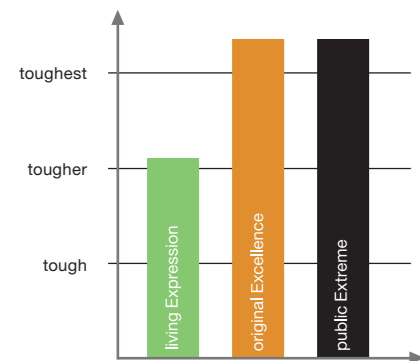

Scratch resistance

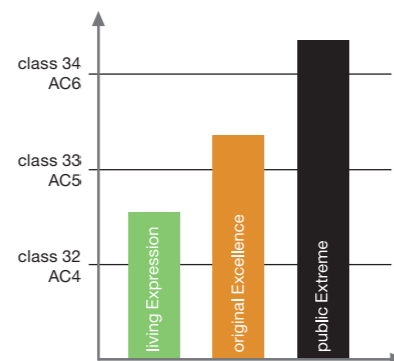

Wear resistance

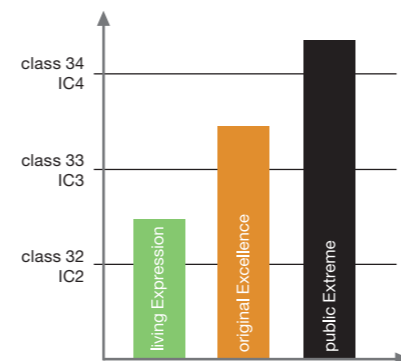

Impact resistance

# sensation

- » Deep, true-to-nature textures like never before
- » New matt surface for an exclusive look
- » Designed all the way from bevel to bevel
- » Pergo durability even in the bevels
- » AquaSafe technology for superior water-resistance



wide long plank 2050 x 240 mm | 4-way bevel

SIBERIAN OAK, PLANK L0234-03568 GW / MA L0334-03568 GW / MA	ROCKY MOUNTAIN OAK, PLANK L0234-03570 GW / EM L0334-03570 GW / EM	SEASIDE OAK, PLANK L0234-03571 GW / SM L0334-03571 GW / SM	CHATEAU OAK, PLANK L0234-03589 GW / MA L0334-03589 GW / MA	COUNTRY OAK, PLANK L0234-03590 GW / SM L0334-03590 GW / SM
LIGHT FJORD OAK, PLANK L0234-03862 GR / EM L0334-03862 GR / EM	FJORD OAK, PLANK L0234-03863 GR / EM L0334-03863 GR / EM	LODGE OAK, PLANK L0234-03864 GR / EM L0334-03864 GR / EM	CHALKED NORDIC OAK, PLANK L0234-03865 GW / MA L0334-03865 GW / MA	BEACH TOWN OAK, PLANK L0234-03870 GR / EM L0334-03870 GR / EM

STRUCTURE: WO Wood SO Smooth GW Genuine™ wood GR Genuine™ rustic GC Genuine™ sawcut GS Genuine™ stone AW Antique wood

GLOSS: SP Semi polished SM Silk matt MA Matt EM Extra matt

■ public Extreme ■ original Excellence ■ living Expression



modern plank sensation

1380 x 190 x 8 mm  
4-way bevel



LIMED GREY OAK, PLANK  
L0231-03367  
L0331-03367 GW / EM




URBAN GREY OAK, PLANK  
L0231-03368  
L0331-03368 GW / EM




NEW ENGLAND OAK, PLANK  
L0231-03369  
L0331-03369 GR / SM




MANOR OAK, PLANK  
L0231-03370  
L0331-03370 GR / SM




BARNHOUSE OAK, PLANK  
L0239-04307  
L0339-04307 GR / MA




MEADOW OAK, PLANK  
L0239-04309  
L0339-04309 GW / SM



VINTAGE GREY OAK, PLANK  
L0239-04311  
L0339-04311 GW / SM



ESTATE OAK, PLANK  
L0239-04313  
L0339-04313 GW / SM



WEATHERED PINE, PLANK  
L0239-04315  
L0339-04315 GW / MA



FARMHOUSE OAK, PLANK  
L0231-03371  
L0331-03371 GR / SM



MODERN DANISH OAK, PLANK  
L0231-03372  
L0331-03372 GW / SM




BRUSHED WHITE PINE, PLANK  
L0231-03373  
L0331-03373 GW / EM



COASTAL OAK, PLANK  
L0231-03374  
L0331-03374 GW / EM




VILLAGE OAK, PLANK  
L0231-03375  
L0331-03375 GW / EM




TASMANIAN OAK  
L0239-04317  
L0339-04317 WO / MA



REFINED WALNUT, PLANK  
L0239-04319  
L0339-04319 WO / MA



MODERN GREY OAK, PLANK  
L0223-01753  
L0323-01753 GW / SM



CHOCOLATE OAK, PLANK  
L0223-01754  
L0323-01754 GW / SM

long plank  
2050 x 205 mm  
4-way bevel



SCRAPED VINTAGE OAK, PLANK  
L0231-03376  
L0331-03376 GR / SP



FROST WHITE OAK, PLANK  
L0231-03866  
L0331-03866 GW / MA



STUDIO OAK, PLANK  
L0231-03867  
L0331-03867 GW / MA



CITY OAK, PLANK  
L0231-03868  
L0331-03868 GW / MA



BLACK PEPPER OAK, PLANK  
L0231-03869  
L0331-03869 GR / SM



DRIFT OAK, PLANK  
L0223-01755  
L0323-01755 GW / SM




EUROPEAN OAK, PLANK  
L0223-01756  
L0323-01756 GW / SM



BURNT OAK, PLANK  
L0223-01757  
L0323-01757 GW / SM



RECLAIMED GREY OAK, PLANK  
L0223-01760  
L0323-01760 GR / SM




MIDNIGHT OAK, PLANK  
L0223-01763  
L0323-01763 GW / SM




modern plank sensation


1380 x 190 x 9 mm  
4-way bevel




NORTH CAPE OAK, PLANK  
L0239-04289  
L0339-04289 GW / MA



NORDIC SAND OAK, PLANK  
L0239-04291  
L0339-04291 GW / MA



SKAGEN OAK, PLANK  
L0239-04293  
L0339-04293 GW / MA




STOCKHOLM OAK, PLANK  
L0239-04295  
L0339-04295 GW / MA



WINTER OAK, PLANK  
L0223-01764  
L0323-01764 GW / SM



AUTUMN OAK, PLANK  
L0223-01765  
L0323-01765 GW / SM




NATURAL ASH, PLANK  
L0223-01766  
L0323-01766 AW / SM




CLASSIC BEIGE OAK, PLANK  
L0223-03359  
L0323-03359 GR / SM



ROYAL OAK, PLANK  
L0223-03360  
L0323-03360 GR / SM




ISLAND OAK, PLANK  
L0239-04297  
L0339-04297 GW / MA




TUNDRA OAK, PLANK  
L0239-04299  
L0339-04299 GW / MA



RIVERSIDE OAK, PLANK  
L0239-04301  
L0339-04301 GW / MA




GREY BARNHOUSE OAK, PLANK  
L0239-04303  
L0339-04303 GR / MA



MOORLAND OAK, PLANK  
L0239-04305  
L0339-04305 GR / MA




ROMANTIC OAK, PLANK  
L0223-03361  
L0323-03361 GW / SM



COTTAGE GREY OAK, PLANK  
L0223-03362  
L0323-03362 GW / SM



MERBAU, PLANK  
L0141-01599  
L0241-01599 SO / SP



PREMIUM OAK, PLANK  
L0141-01801  
L0341-01801 GW / SM



classic plank

1200 x 190 mm

public Extreme original Excellence living Expression

STRUCTURE: WO Wood SO Smooth GW Genuine™ wood GR Genuine™ rustic GC Genuine™ sawcut GS Genuine™ stone AW Antique wood  
GLOSS: SP Semi polished SM Silk matt MA Matt EM Extra matt



**MOUNTAIN GREY OAK, PLANK**  
 ■ L0141-01802  
 ■ L0241-01802  
 ■ L0341-01802      **GW / SM**

**THERMOTREATED OAK, PLANK**  
 ■ L0141-01803  
 ■ L0241-01803  
 ■ L0341-01803      **GW / SM**

**NATURAL OAK, PLANK**  
 ■ L0141-01804  
 ■ L0241-01804  
 ■ L0341-01804      **GW / SM**

**DARK GREY OAK, PLANK**  
 ■ L0141-01805  
 ■ L0241-01805  
 ■ L0341-01805      **GW / SM**

**BLACK OAK, PLANK**  
 ■ L0141-01806  
 ■ L0241-01806  
 ■ L0341-01806      **GW / SM**



**SILVER OAK, PLANK**  
 ■ L0141-01807  
 ■ L0241-01807  
 ■ L0341-01807      **GW / SM**

**NATURAL SAWCUT OAK, PLANK**  
 ■ L0141-01809  
 ■ L0241-01809  
 ■ L0341-01809      **GC / SM**

**NORDIC PINE, PLANK**  
 ■ L0141-01810  
 ■ L0241-01810  
 ■ L0341-01810      **WO / WA**


**MORNING OAK, PLANK**  
 ■ L0141-03364  
 ■ L0241-03364  
 ■ L0341-03364      **GW / SM**

**VINEYARD OAK, PLANK**  
 ■ L0141-03366  
 ■ L0241-03366  
 ■ L0341-03366      **GW / SM**



big slab

1224 x 408 mm  
4-way bevel

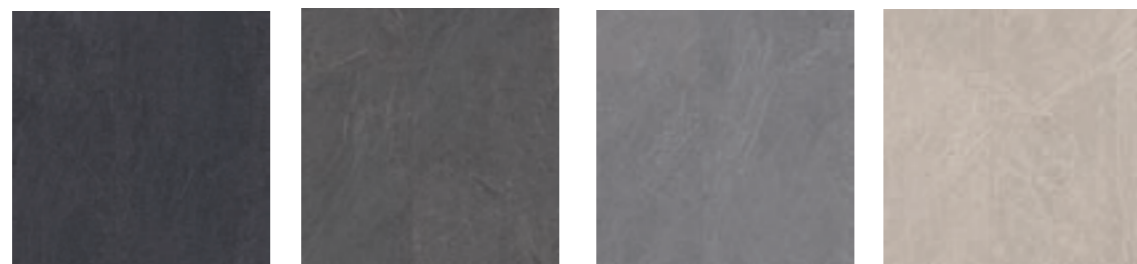


**CHARCOAL SLATE**  
 ■ L0220-01778  
 ■ L0320-01778      **GS / MA**

**MEDIUM GREY SLATE**  
 ■ L0220-01779  
 ■ L0320-01779      **GS / MA**

**LIGHT GREY SLATE**  
 ■ L0220-01780  
 ■ L0320-01780      **GS / MA**

**ALPACA SLATE**  
 ■ L0220-01781  
 ■ L0320-01781      **GS / MA**



big slab

1224 x 408 mm



**CONCRETE MEDIUM GREY**  
 ■ L0218-01782  
 ■ L0318-01782      **SO / MA**

**WHITE SLAB**  
 ■ L0218-01783  
 ■ L0318-01783      **SO / MA**

# DOMESTIC elegance

1200 x 190 mm

- » Class 23/32
- » TitanX™
- » Uniclic
- » Fire Class C<sub>fl</sub>-s1
- » 20 year guarantee\*

\* guarantee for commercial use on request



**VINEYARD OAK, PLANK**  
 L0601-04386  
 L0607-04386 – 4-way bevel      **GW / SM**

**MILK WHITE OAK, PLANK**  
 L0601-04387  
 L0607-04387 – 4-way bevel      **GW / SM**

**ELEGANT GREY OAK, PLANK**  
 L0601-04388  
 L0607-04388 – 4-way bevel      **GW / SM**

**RIVER OAK, PLANK**  
 L0601-04389  
 L0607-04389 – 4-way bevel      **GW / SM**

**NATURAL BEIGE OAK, PLANK**  
 L0601-04390  
 L0607-04390 – 4-way bevel      **GW / SM**



**HIGHLAND BROWN OAK, PLANK**  
 L0601-04391  
 L0607-04391 – 4-way bevel      **GW / SM**

**CONVENT OAK, PLANK**  
 L0601-04392  
 L0607-04392 – 4-way bevel      **GW / SM**

**CANYON OAK, PLANK**  
 L0601-04393  
 L0607-04393 – 4-way bevel      **GW / SM**

**WARM NATURAL OAK, PLANK**  
 L0601-04394  
 L0607-04394 – 4-way bevel      **GW / SM**

**WATERFRONT OAK, PLANK**  
 L0601-04395  
 L0607-04395 – 4-way bevel      **GW / SM**


■ public **Extreme** ■ original **Excellence** ■ living **Expression**

**STRUCTURE:** WO Wood SO Smooth GW Genuine™ wood GR Genuine™ rustic GC Genuine™ sawcut GS Genuine™ stone AW Antique wood  
**GLOSS:** SP Semi polished SM Silk matt MA Matt EM Extra matt


# 5-in-1 profile




**1**  
T-moulding  
From laminate to laminate.



**2**  
Carpet transition  
From laminate to carpet.




**3**  
Hard surface reducer  
From laminate to ceramic, vinyl or linoleum.









**4**  
End moulding  
Finishing up to threshold, sliding doors, etc.



**5**  
Stair nose-moulding, flush  
For a flush finish on stair treads.



**5**  
Stair nose moulding  
For a step down from a floating floor, e.g. at the top of the stairs or a step down in a room.




PGINCP(-)  
2150 x 13 x 48 mm  
(see matching matrix for correct art no)



The Incizo® subprofile is required for stair application and has to be ordered separately.  
NEINCPBASE(-) (see matching matrix for correct art no)

## wallbases




### Wallbase, straight

PGSK(-), 2400 x 12 x 58 mm – modern plank 9 mm, domestic elegance\*  
PGPSK(-), 2400 x 14 x 77 mm – modern plank 9 mm, domestic elegance

See matching matrix for correct art no. Colour matched. Surface: wear and scratch-resistant laminate. Core: MDF. PGSK(-) is adaptable to 40 mm height.  
\*8 straight and 8 corner connecting plugs included / pack (6 wallbases).

### Extra connecting plugs


NEPLUG, 48 pcs (24 corner plugs + 24 straight plugs)



### Wallbase, straight

PGSKR(-), 2400 x 14 x 58 mm – wide long plank, modern plank 8 mm, long plank, classic plank, big slab  
PGPSKR(-), 2400 x 14 x 77 mm – wide long plank, modern plank 8 mm, long plank, classic plank, big slab

See matching matrix for correct art no. Colour matched. Surface: wear and scratch-resistant laminate. Core: MDF.



### Wallbase, straight

PGSKRWHITE, 2400 x 14 x 58 mm – white  
PGSKRPAINT, 2400 x 14 x 58 mm – paintable  
PGPSKRWHITE, 2400 x 14 x 77 mm – white  
PGPSKRPAINT, 2400 x 14 x 77 mm – paintable

Colour: white, paintable. Surface: foil. Core: MDF.



### Wallbase, cover

PGISKRCOVERMD240, 2400 x 16 x 129 mm



For easy and fast renovation.  
Covers existing wallbase. Adaptable size.  
Colour: paintable. Surface: foil. Core: MDF.



### Waterproof wallbase

NEVSKRPAINTA, 2000 x 12 x 55 mm


Waterproof. Hides expansion joints and protects walls.  
Install with Multiglue. Colour: white, paintable.  
Surface and core: waterproof polystyren.

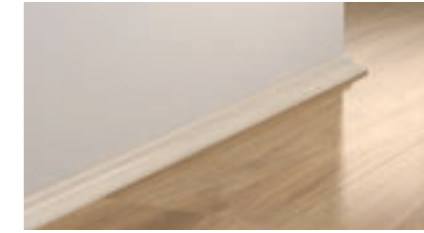

### Beading

PGSCOTWHITE, 2400 x 17 x 17 mm – white  
PGSCOTPAINT, 2400 x 17 x 17 mm – paintable

Colour: white, paintable. Surface: foil. Core: MDF.




### Beading

PGSCOT(-), 2400 x 17 x 17 mm – modern plank 9 mm, domestic elegance

See matching matrix for correct art no.  
Colour matched. Surface: wear and scratch-resistant laminate.  
Core: MDF.


## aluminium moldings



### Combi moulding

PGPRSILV, 1860 x 47 mm


T-moulding and reducer in one. Plastic bottom rail.  
Suitable for height differences of 0 – 12.3 mm.  
Height: 10 mm (uninstalled). Colour: silver. Surface: aluminium.



### End moulding

PGENPSILVME270, 2700 x 25 mm

Fits flooring thickness 6 – 10 mm.  
Colour: silver. Surface: aluminium.

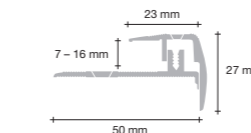


### Stair nose


PGSTPSILVME270, 2700 x 23 mm

Fits flooring thickness 7 – 16 mm.  
Colour: silver. Surface: aluminium.


# commercial moldings




**T-moulding, colour matched**  
 PGEXPC(-), 2350 x 50 mm (see matching matrix for correct art no)  
 From laminate to laminate. Easy installation with snap-in function.  
 Material: solid aluminium. Surface: flooring laminate, AC5, TitanX™-surface.  
 Bottom part: galvanised iron. Minimum order quantity: 30 pc.





**T-moulding, silver**  
 PGEXPCSILVME270, 2700 x 45 mm  
 Flexible in height. Flooring thickness (including underlay) 7 – 12 mm.  
 Surface: aluminium.





**End moulding, silver**  
 PGENPCSILVME270, 2700 x 17 mm  
 Fits to flooring thickness of 9 and 10 mm.  
 Surface: aluminium.



**Ramp profile, silver**  
 PGRPC80SILVME270, 2700 x 80 mm  
 Flexible in height. Flooring thickness (including underlay) 9 – 15 mm.  
 Extremely resistant aluminium profile. Surface: aluminium.

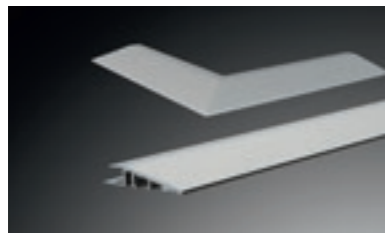

**Ramp profile without screws**  
 PGRPC55SILVME315A, 3150 x 55 mm  
 Fits to flooring thickness of 8 – 9 mm.  
 With EPDM moulding and plastic connectors. Surface: aluminium.

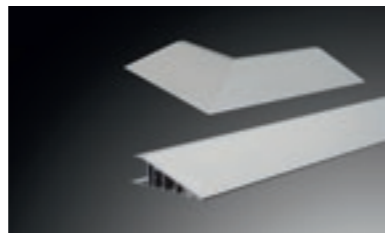

**Ramp profile high without screws**  
 PGRPC85SILVME315, 3150 x 85 mm  
 Fits to flooring construction of 22 mm.  
 Surface: aluminium

**Precut 90° corner without screws**  
 PGRPC55CORN SILVMEA

**Precut 90° corner without screws**  
 PGRPC85CORN SILVME



**End profile, bendable**  
 NEBENDPCSILVME270, 2700 x 28 mm  
 For finishing laminate “islands” in curved shapes.  
 Height 13.1 mm. Surface: silver anodized aluminium.  
 10 pc / pack. To be installed with special bending tool NEBTOOL.



**Bending tool**  
 NEBTOOL, 380 x 410 mm  
 For use in combination with bendable end profile.  
 Height 235 mm. 1 pc / pack.



# underlays for professional use


**Professional SoundBloc™**  
 PGUDLPS15, 0.95 x 15.79 m = 15 m<sup>2</sup> / roll  
 PGUDLPS50, 0.95 x 52.64 m = 50 m<sup>2</sup> / roll

The best underlay for eliminating reflected walking sound. Increases walking comfort and provides excellent impact sound insulation. Integrated vapour barrier with an overlap and tape strip included. Thickness: 2 mm. Material: Crosslinked polyethelene foam.

# underlays for wood subfloors

Durability  
 Walking sound reduction  
 Floor heating  
 Vapour barrier  
 Thickness

**GOOD**  
 Underlay Foam  
 ●●○○○○  
 ●●○○○○  
 ●●●○○○  
 NO  
 2 mm

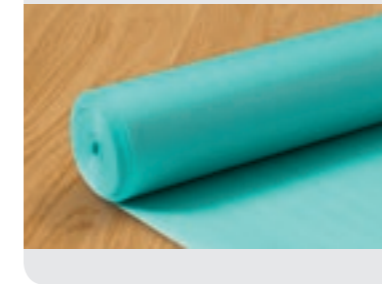


**Underlay Foam**  
 PGUDLFOAM15B  
 For rooms with light traffic.  
 15 m<sup>2</sup> / roll.

**BETTER**  
 Smart Underlay  
 ●●●●○○  
 ●●●○○○  
 ●●●○○○  
 NO  
 3 mm



**Smart Underlay**  
 PGUDLSMART15  
 For rooms with frequent traffic.  
 15 m<sup>2</sup> / pack.

**BEST**  
 Silent Walk  
 ●●●●●●  
 ●●●●○○  
 ●●●●●●  
 YES\*  
 2 mm

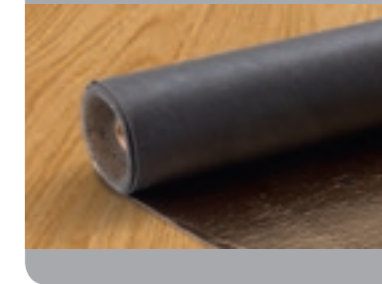


**Silent Walk**  
 PGUDLSW7  
 A very durable and strong underlay for rooms with more frequent traffic.  
 7 m<sup>2</sup> / roll.

# underlays for concrete subfloors

Durability  
 Walking sound reduction  
 Floor heating  
 Vapour barrier  
 Thickness

**GOOD**  
 Underlay Foam+  
 ●●●○○○  
 ●●●○○○  
 ●●●○○○  
 YES  
 2 mm

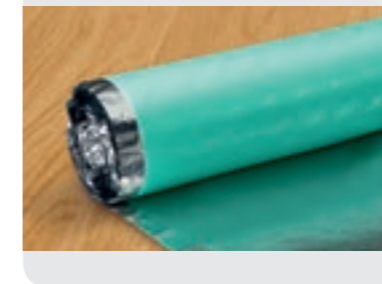


**Underlay Foam+**  
 PGUDLFOAMPLUS15  
 A good basis for rooms with less traffic. Integrated vapour barrier with an overlap and tape strip included.  
 15 m<sup>2</sup> / roll.

**BETTER**  
 Smart Underlay+  
 ●●●●○○  
 ●●●○○○  
 ●●●○○○  
 YES  
 3 mm



**Smart Underlay+**  
 PGUDLSMARTPLUS15  
 Good in rooms with more frequent traffic. Integrated vapour barrier with an overlap and tape strip included.  
 15 m<sup>2</sup> / pack.

**BEST**  
 Silent Walk  
 ●●●●●●  
 ●●●●○○  
 ●●●●●●  
 YES\*  
 2 mm

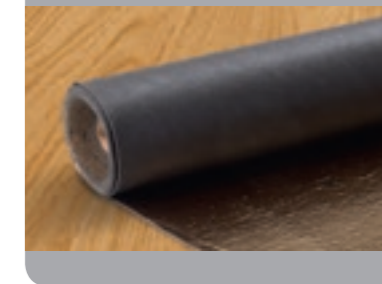

**Silent Walk**  
 PGUDLSW7  
 A very durable and strong underlay for rooms with more frequent traffic.  
 7 m<sup>2</sup> / roll.


\*When installing the SilentWalk on concrete floors or atop floorheating, tape the edges of the underlay with a damp-proof tape. Don't do this when installing on wooden subfloors.

# floor heating



**Pergo quickheat, 55**  
 PGUDLQH2, 2 x 1 m  
 PGUDLQH3, 3 x 1 m  
 PGUDLQH4, 4 x 1 m  
 PGUDLQH5, 5 x 1 m

55 W / m<sup>2</sup>. 220 V 50 Hz (European plug). Max load: 10 A (2300 W at 230 V). Maximum installation area: 42 m<sup>2</sup>. Suitable for 5% - 95% relative humidity. Thickness: 8 mm. Thermal Insulation: 8 W / m<sup>2</sup> K.

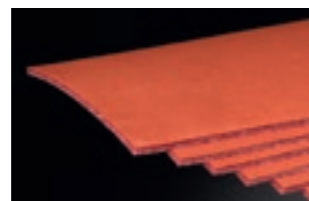

**Filler mat**  
 PGUDLQHILLERMAT, 6.37 m<sup>2</sup>  
 26 mats / box. Used for the space between the heating mats and the wall.



**Installation kit, wireless**  
 PGUDLQHKITEU  
 Wireless thermostat, safety box, connector tool and installation instructions.



**Extension cables**  
 PGQHEXTCAB025, 0.25 m  
 PGQHEXTCAB100, 1.0 m  
 PGQHEXTCAB200, 2.0 m  
 Used between mats and/or to extend between mats and safety box.



**Wood tapping block**  
 PGWTAPPINGBLOCK,  
 520 x 110 x 62 mm  
 Professional tapping block. 10 pc / pack.



**Professional pullbar**  
 PGWPULLBAR, 700 x 280 x 230 mm  
 Professional and silent pullbar thanks to the rubber shock absorber on the contact surface. 1 pc / pack.



**Laminate cutter**  
 PGLAMCUT, 700 x 280 x 230 mm  
 Manual, steel cutter. Positionable trestle for long boards and dust collector, included. 1 pc / pack.



**Multiglu**  
 PGGLUE290, 290 ml  
 Ideal for installing wallbases and mouldings. Hybrid polymer. One tube gives 15 running meters of skirting.

# installation



**Moisturbloc Extreme™**  
 PGUDLMOI15, 1.05 x 15 m = 15 m<sup>2</sup>

This vapour barrier has three times the moisture resistance of a traditional PE film. Can be installed on concrete floors with up to 95% relative humidity, making it ideal in basements and on concrete floors with high humidity. Moisturbloc Extreme™ makes it possible to install floors earlier during the construction of new homes. Thickness: 2.5 mm. Material: Polypropylene. Tape included.



**PE film (polyethylene)**  
 PGUDLSCREEN34, 12.5 x 2.7 m = 33.75 m<sup>2</sup> / roll

A film that protects flooring from moisture vapour rising up from a mineral or concrete subfloor. Useful lifetime 50 years. Thickness: 0.2 mm. Material: Polyethylene, alkaline resistant.



**Installation kit**  
 PGTOOL  
 Everything you need in one box. Contains tapping block, installation spacers in two sizes (2 x 18 = 36 pcs) and a pull bar.

**Extra spacers**  
 PGSPACER, 48 pcs



**Wallbase installation kit**  
 PGCLIPS15LM  
 For PGSKR(-) and PGPSKR(-) wallbases only, including installation spacers in two sizes. Easy-to-use snap-in system where no nails or screws are visible. One installation kit covers 15 metres of wallbase.



**Sealant**  
 PGKIT(-), 310ml  
 For a beautiful finish. Dry in half an hour and fully cured after 24 hours. Available in 8 colours. Water-based acrylic.



**Radiator caps**  
 PGRCINOX15, stainless steel  
 Inner / outer diameter: 15 / 54 mm  
 PGRCINOX22, stainless steel  
 Inner / outer diameter: 22 / 54 mm



**Tape**  
 NETAPE50, 50 m x 5 cm  
 Self-adhesive aluminium tape for underlays.



## Aqua accessories – for wet-area use with water-resistant laminate



**Aqua Sealant**  
 PGKITTRANSP, 310 ml  
 For invisible and waterproof finishing around wallbases, mouldings, transitions, door frames, etc.



**Foamstrip**  
 NEFOAMSTRIP20, 20 m x 10 mm  
 PE foam expansion joint filler. Serves as an elastic filler of all dilatation gaps around the floor perimeter. Requires sealing with Aqua Sealant.



**Wallbase installation clips**  
 PGCLIPSKME95 – modern plank 9 mm  
 PGCLIPSKME7080 – domestic elegance  
 For PGSK(-) wallbases only. Easy-to-use snap-in system where no nails or screws are needed. One installation kit covers 20 metres of wallbase.



**Wallbase installation track**  
 NETRACK  
 For PGPSK(-) wallbases only. Glue on installation. Useful for easy access of hidden cables. One track per skirting is needed.



**Safeseal**  
 PGSEAL500, 500 ml  
 For floor areas that require extra protection against moisture. PVAc based.

# maintenance



**Cleaning kit**  
 PGCLEANKIT  
 High-quality mop set with extra-long ergonomic handle and a mop cloth holder with a practical Velcro fastener for attaching the mop cloth.




**All round Floor Cleaner**  
 PGCLEANALL1000  
 Specially developed for cleaning laminate, wood and vinyl flooring. Ideal for removing dirt, grease spots and heel marks, as well as for daily cleaning.




**Repair wax**  
 PGREPAIR  
 Repair the colour of damaged planks quickly and easily with wax in colours covering the Pergo wood palette. Contains 1 melting knife, 1 comb, 7 wax blocks. For more information on how to mix colours please visit pergo.com


# matching matrix

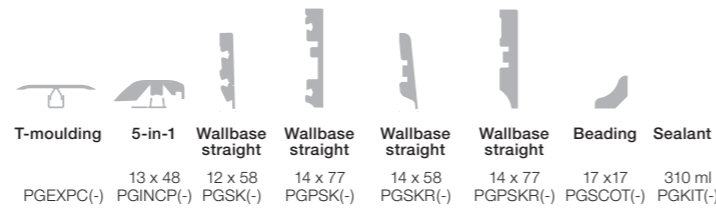

	public Extreme	original Excellence	living Expression	Art.nr / Decor	T-moulding	5-in-1	Wallbase straight	Wallbase straight	Wallbase straight	Wallbase straight	Beading	Sealant
					PGEXPC(-)	13 x 48 PGINCP(-)	12 x 58 PGSK(-)	14 x 77 PGPSK(-)	14 x 58 PGSKR(-)	14 x 77 PGPSKR(-)	17 x 17 PGSCOT(-)	310 ml PGKIT(-)
L0141-01599	L0241-01599	L0341-01599	Merbau, plank	01599	01599	-	-	01599	01599	-	07	
L0141-01801	L0241-01801	L0341-01801	Premium Oak, plank	01801	01801	-	-	01801	01801	-	04	
L0141-01802	L0241-01802	L0341-01802	Mountain Grey Oak, plank	01802	01802	-	-	01802	01802	-	02	
L0141-01803	L0241-01803	L0341-01803	Thermotreated Oak, plank	01803	01803	-	-	01803	01803	-	08	
L0141-01804	L0241-01804	L0341-01804	Natural Oak, plank	01731	01731	-	-	01731	01731	-	05	
L0141-01805	L0241-01805	L0341-01805	Dark Grey Oak, plank	01730	01730	-	-	01730	01730	-	02	
L0141-01806	L0241-01806	L0341-01806	Black Oak, plank	01806	01806	-	-	01806	01806	-	08	
L0141-01807	L0241-01807	L0341-01807	Silver Oak, plank	01807	01807	-	-	01807	01807	-	01	
L0141-01809	L0241-01809	L0341-01809	Natural Sawcut Oak, plank	01798	01798	-	-	01798	01798	-	04	
L0141-01810	L0241-01810	L0341-01810	Nordic Pine, plank	01810	01810	-	-	01810	01810	-	04	
L0141-03364	L0241-03364	L0341-03364	Morning Oak, plank	03364	03364	-	-	03364	03364	-	02	
L0141-03366	L0241-03366	L0341-03366	Vineyard Oak, plank	03366	03366	-	-	03366	03366	-	04	
L0218-01782	L0318-01782	L0318-01782	Concrete Medium Grey	01782	01782	-	-	01782	01782	-	02	
L0218-01783	L0318-01783	L0318-01783	White Slab	01783	01783	-	-	01783	01783	-	01	
L0220-01778	L0320-01778	L0320-01778	Charcoal Slate	01778	01778	-	-	01778	01778	-	02	
L0220-01779	L0320-01779	L0320-01779	Medium Grey Slate	01779	01779	-	-	01779	01779	-	02	
L0220-01780	L0320-01780	L0320-01780	Light Grey Slate	01780	01780	-	-	01780	01780	-	02	
L0220-01781	L0320-01781	L0320-01781	Alpaca Slate	01781	01781	-	-	01781	01781	-	02	
L0223-01753	L0323-01753	L0323-01753	Modern Grey Oak, plank	01753	01753	-	-	01753	01753	-	03	
L0223-01754	L0323-01754	L0323-01754	Chocolate Oak, plank	01754	01754	-	-	01754	01754	-	08	
L0223-01755	L0323-01755	L0323-01755	Drift Oak, plank	01755	01755	-	-	01755	01755	-	03	
L0223-01756	L0323-01756	L0323-01756	European Oak, plank	01756	01756	-	-	01756	01756	-	05	
L0223-01757	L0323-01757	L0323-01757	Burnt Oak, plank	01757	01757	-	-	01757	01757	-	04	
L0223-01760	L0323-01760	L0323-01760	Reclaimed Grey Oak, plank	01760	01760	-	-	01760	01760	-	02	
L0223-01763	L0323-01763	L0323-01763	Midnight Oak, plank	01763	01763	-	-	01763	01763	-	02	
L0223-01764	L0323-01764	L0323-01764	Winter Oak, plank	01764	01764	-	-	01764	01764	-	02	
L0223-01765	L0323-01765	L0323-01765	Autumn Oak, plank	01765	01765	-	-	01765	01765	-	02	
L0223-01766	L0323-01766	L0323-01766	Natural Ash, plank	01766	01766	-	-	01766	01766	-	03	
L0223-03359	L0323-03359	L0323-03359	Classic Beige Oak, plank	03359	03359	-	-	03359	03359	-	04	
L0223-03360	L0323-03360	L0323-03360	Royal Oak, plank	03360	03360	-	-	03360	03360	-	08	
L0223-03361	L0323-03361	L0323-03361	Romantic Oak, plank	03361	03361	-	-	03361	03361	-	02	
L0223-03362	L0323-03362	L0323-03362	Cottage Grey Oak, plank	03362	03362	-	-	03362	03362	-	02	
L0231-03367	L0331-03367	L0331-03367	Limed Grey Oak, plank	03367	03367	-	-	03367	03367	-	02	
L0231-03368	L0331-03368	L0331-03368	Urban Grey Oak, plank	03368	03368	-	-	03368	03368	-	02	
L0231-03369	L0331-03369	L0331-03369	New England Oak, plank	03369	03369	-	-	03369	03369	-	02	
L0231-03370	L0331-03370	L0331-03370	Manor Oak, plank	03370	03370	-	-	03370	03370	-	04	
L0231-03371	L0331-03371	L0331-03371	Farmhouse Oak, plank	03371	03371	-	-	03371	03371	-	08	
L0231-03372	L0331-03372	L0331-03372	Modern Danish Oak, plank	03372	03372	-	-	03372	03372	-	01	
L0231-03373	L0331-03373	L0331-03373	Brushed White Pine, plank	03373	03373	-	-	03373	03373	-	01	
L0231-03374	L0331-03374	L0331-03374	Coastal Oak, plank	03374	03374	-	-	03374	03374	-	03	
L0231-03375	L0331-03375	L0331-03375	Village Oak, plank	03375	03375	-	-	03375	03375	-	04	
L0231-03376	L0331-03376	L0331-03376	Scraped Vintage Oak, plank	03376	03376	-	-	03376	03376	-	05	
L0231-03866	L0331-03866	L0331-03866	Frost White Oak, plank	03866	03866	-	-	03866	03866	-	02	
L0231-03867	L0331-03867	L0331-03867	Studio Oak, plank	03867	03867	-	-	03867	03867	-	02	
L0231-03868	L0331-03868	L0331-03868	City Oak, plank	03868	03868	-	-	03868	03868	-	04	
L0231-03869	L0331-03869	L0331-03869	Black Pepper Oak, plank	03869	03869	-	-	03869	03869	-	08	
L0234-03568	L0334-03568	L0334-03568	Siberian Oak, plank	03568	03568	-	-	03568	03568	-	02	
L0234-03570	L0334-03570	L0334-03570	Rocky Mountain Oak, plank	03570	03570	-	-	03570	03570	-	02	
L0234-03571	L0334-03571	L0334-03571	Seaside Oak, plank	03571	03571	-	-	03571	03571	-	03	
L0234-03589	L0334-03589	L0334-03589	Chateau Oak, plank	03589	03589	-	-	03589	03589	-	05	
L0234-03590	L0334-03590	L0334-03590	Country Oak, plank	03590	03590	-	-	03590	03590	-	08	
L0234-03862	L0334-03862	L0334-03862	Light Fjord Oak, plank	03862	03862	-	-	03862	03862	-	01	
L0234-03863	L0334-03863	L0334-03863	Fjord Oak, plank	03863	03863	-	-	03863	03863	-	02	
L0234-03864	L0334-03864	L0334-03864	Lodge Oak, plank	03864	03864	-	-	03864	03864	-	08	
L0234-03865	L0334-03865	L0334-03865	Chalked Nordic Oak, plank	03865	03865	-	-	03865	03865	-	02	
L0234-03870	L0334-03870	L0334-03870	Beach Town Oak, plank	03870	03870	-	-	03870	03870	-	04	
L0239-04289	L0339-04289	L0339-04289	North Cape Oak, plank	04289	04289	04289	04289	-	-	04289	01	

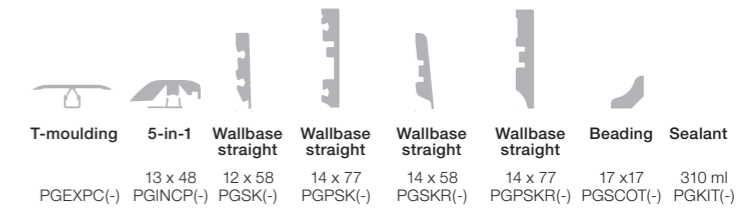

	public Extreme	original Excellence	living Expression	Art.nr / Decor	T-moulding	5-in-1	Wallbase straight	Wallbase straight	Wallbase straight	Wallbase straight	Beading	Sealant
					PGEXPC(-)	13 x 48 PGINCP(-)	12 x 58 PGSK(-)	14 x 77 PGPSK(-)	14 x 58 PGSKR(-)	14 x 77 PGPSKR(-)	17 x 17 PGSCOT(-)	310 ml PGKIT(-)
L0239-04291	L0339-04291	L0339-04291	Nordic Sand Oak, plank	04291	04291	04291	04291	-	-	04291	01	
L0239-04293	L0339-04293	L0339-04293	Skagen Oak, plank	04293	04293	04293	04293	-	-	04293	03	
L0239-04295	L0339-04295	L0339-04295	Stockholm Oak, plank	04295	04295	04295	04295	-	-	04295	04	
L0239-04297	L0339-04297	L0339-04297	Island Oak, plank	04297	04297	04297	04297	-	-	04297	03	
L0239-04299	L0339-04299	L0339-04299	Tundra Oak, plank	04299	04299	04299	04299	-	-	04299	04	
L0239-04301	L0339-04301	L0339-04301	Riverside Oak, plank	04301	04301	04301	04301	-	-	04301	06	
L0239-04303	L0339-04303	L0339-04303	Grey Barnhouse Oak, plank	04303	04303	04303	04303	-	-	04303	06	
L0239-04305	L0339-04305	L0339-04305	Moorland Oak, plank	04305	04305	04305	04305	-	-	04305	03	
L0239-04307	L0339-04307	L0339-04307	Barnhouse Oak, plank	04307	04307	04307	04307	-	-	04307	02	
L0239-04309	L0339-04309	L0339-04309	Meadow Oak, plank	04309	04309	04309	04309	-	-	04309	08	
L0239-04311	L0339-04311	L0339-04311	Vintage Grey Oak, plank	04311	04311	04311	04311	-	-	04311	02	
L0239-04313	L0339-04313	L0339-04313	Estate Oak, plank	04313	04313	04313	04313	-	-	04313	04	
L0239-04315	L0339-04315	L0339-04315	Weathered Pine, plank	04315	04315	04315	04315	-	-	04315	-	
L0239-04317	L0339-04317	L0339-04317	Tasmanian Oak, plank	04317	04317	04317	04317	-	-	04317	06	
L0239-04319	L0339-04319	L0339-04319	Refined Walnut, plank	04319	04319	04319	04319	-	-	04319	06	

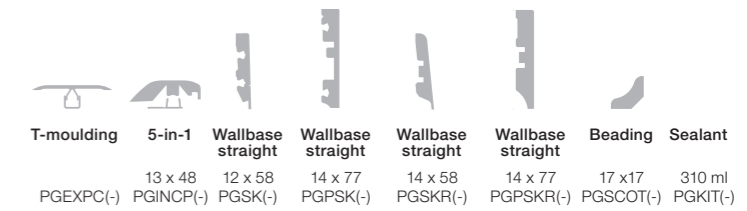

	domestic Elegance	Art.nr / Decor	T-moulding	5-in-1	Wallbase straight	Wallbase straight	Wallbase straight	Wallbase straight	Beading	Sealant
			PGEXPC(-)	13 x 48 PGINCP(-)	12 x 58 PGSK(-)	14 x 77 PGPSK(-)	14 x 58 PGSKR(-)	14 x 77 PGPSKR(-)	17 x 17 PGSCOT(-)	310 ml PGKIT(-)
L060x-04386	Vineyard Oak, plank	04386	04386	04386	04386	-	-	04386	02	
L060x-04387	Milk White Oak, plank	04387	04387	04387	04387	-	-	04387	01	
L060x-04388	Elegant Grey Oak, plank	04388	04388	04388	04388	-	-	04388	02	
L060x-04389	River Oak, plank	04389	04389	04389	04389	-	-	04389	03	
L060x-04390	Natural Beige Oak, plank	04390	04390	04390	04390	-	-	04390	03	
L060x-04391	Highland Brown Oak, plank	04391	04391	04391	04391	-	-	04391	02	
L060x-04392	Convent Oak, plank	04392	04392	04392	04392	-	-	04392	03	
L060x-04393	Canyon Oak, plank	04393	04393	04393	04393	-	-	04393	04	
L060x-04394	Warm Natural Oak, plank	04394	04394	04394	04394	-	-	04394	04	
L060x-04395	Waterfront Oak, plank	04395	04395	04395	04395	-	-	04395	02	

## Incizo® stairbase subprofile

PRODUCT GROUP	RANGE	MAT. DESCRIPTION	FITS TO FLOOR THICKNESS
Classic plank	domestic Elegance	NEINCPBASE1	7 mm
Classic plank, big slab	living Expression / original Excellence	NEINCPBASE2	8 mm
Classic plank	public Extreme	NEINCPBASE5	9 mm
Long plank	living Expression / original Excellence	NEINCPBASE6	9.5 mm
Modern plank (Sensation)	living Expression / original Excellence	NEINCPBASE8	8 mm
Wide Long Plank (Sensation)	living Expression / original Excellence	NEINCPBASE6	9.5 mm



# technical guide

Features		public Extreme	original Excellence	living Expression	domestic Elegance
TitanX™		•	•	•	•
Scratch Resistance		Very high	Very high	High	High
AquaSafe Technology*		–	•	•	–
PerfectFold™ 3.0		•	•	•	–
Moisture Resistance		Very high	High	High	Medium
Antistatic		•	•	•	•
Hygienic		•	•	•	•
Environmental label PEFC		•	•	•	•
Environmental label Nordic Ecolabel		•	•	•	•
Triple Guarantee		Lifetime	Lifetime	25 years	20 years
Technical		Standard			
Class of use	EN 13329	34	33	32	32
Fire classification	EN 13501	Bfl-s1	Bfl-s1**	Cfl-s1	Cfl-s1
Formaldehyde emission	EN 717	E1	E1	E1	E1
VOC emission	agBB/DIBt	•	•	•	•
Generic anti-microbial effect	JIS Z 2801	> 99%	> 99%	> 99%	> 99%
Wear Resistance	EN 13329	AC6	AC5	AC4	AC4
Impact Resistance	EN 13329	IC4	IC3	IC2	IC2
Resistance to Castor Chair	EN 13329 (class 34)	No damage	–	–	–
Resistance to Castor Chair	EN 13329	No damage	No damage	No damage	No damage
Slip Resistance	EN 14041	Class DS	Class DS	Class DS	Class DS
Thermal Resistance	EN 12667	0.07 m² K/W	0.07 m² K/W	0.06 m² K/W	0.06 m² K/W
Body Voltage	EN 1815	<2kV (antistatic)	<2kV (antistatic)	<2kV (antistatic)	<2kV (antistatic)

\*available in Modern Plank and Wide Long Plank with a 10-year wet guarantee and Classic Plank with a 5-year wet guarantee.

\*\* Cfl-s1 for Modern Plank 9 mm.

# formats

	length	panel, mm width	thickness	panels/-pack	packages m²/-pack	pack/pallet	m²/pallet
<b>public Extreme</b>							
L0141-xxxxx Classic Plank	1200	190	9	6	1.368	48	65.66
<b>original Excellence</b>							
L0241-xxxxx Classic Plank, <b>aquasafe</b>	1200	190	8	7	1.596	48	76.61
L0223-xxxxx Long Plank 4V	2050	205	9.5	6	2.522	44	110.95
L0231-xxxxx Modern Plank 4V – Sensation, <b>aquasafe</b>	1380	190	8	7	1.835	48	88.08
L0239-xxxxx Modern Plank 4V – Sensation, <b>aquasafe</b>	1380	190	9	6	1.573	64	100.68
L0234-xxxxx Wide Long Plank 4V – Sensation, <b>aquasafe</b>	2050	240	9.5	6	2.952	33	97.42
L0218-xxxxx Big Slab	1224	408	8	2	0.999	80	79.90
L0220-xxxxx Big Slab 4V	1224	408	8	2	0.999	80	79.90
<b>living Expression</b>							
L0341-xxxxx Classic Plank, <b>aquasafe</b>	1200	190	8	7	1.596	48	76.61
L0323-xxxxx Long Plank 4V	2050	205	9.5	6	2.522	44	110.95
L0331-xxxxx Modern Plank 4V – Sensation, <b>aquasafe</b>	1380	190	8	7	1.835	48	88.08
L0339-xxxxx Modern Plank 4V – Sensation, <b>aquasafe</b>	1380	190	9	6	1.573	64	100.68
L0334-xxxxx Wide Long Plank 4V – Sensation, <b>aquasafe</b>	2050	240	9.5	6	2.952	33	97.42
L0318-xxxxx Big Slab	1224	408	8	2	0.999	80	79.90
L0320-xxxxx Big Slab 4V	1224	408	8	2	0.999	80	79.90
<b>domestic Elegance</b>							
L0601-xxxxx Classic Plank	1200	190	7	8	1.824	64	116.74
L0607-xxxxx Classic Plank 4V	1200	190	7	8	1.824	64	116.74

# technical guide: accessories

Wallbases	length mm	width mm	height mm	Piece		Pack		Pallet		Ordering Unit
				qty /pc**	pc /pack	qty /pack**	pc /pallet	qty /pallet**		
PGSK(-)	2400	12	58	2.4 r.m.	6	14.4 r.m.	720	1728 r.m.	pc	
PGPSK(-)	2400	14	77	2.4 r.m.	6	14.4 r.m.	432	1036.8 r.m.	pc	
PGSKR(-)	2400	14	58	2.4 r.m.	6	14.4 r.m.	720	1728 r.m.	pc	
PGSKRWHITE	2400	14	58	2.4 r.m.	6	14.4 r.m.	720	1728 r.m.	pc	
PGSKRPAINT	2400	14	58	2.4 r.m.	6	14.4 r.m.	720	1728 r.m.	pc	
PGPSKR(-)	2400	14	77	2.4 r.m.	6	14.4 r.m.	432	1036.8 r.m.	pc	
PGPSKRWHITE	2400	14	77	2.4 r.m.	6	14.4 r.m.	432	1036.8 r.m.	pc	
PGPSKRPAINT	2400	14	77	2.4 r.m.	6	14.4 r.m.	432	1036.8 r.m.	pc	
PGSCOTWHITE	2400	17	17	2.4 r.m.	6	14.4 r.m.	918	2203.2 r.m.	pc	
PGSCOTPAINT	2400	17	17	2.4 r.m.	6	14.4 r.m.	918	2203.2 r.m.	pc	
PGSCOT(-)	2400	17	17	2.4 r.m.	6	14.4 r.m.	918	2203.2 r.m.	pc	
PGISKRCOVER	2400	16	129	2.4 r.m.	6	14.4 r.m.	336	806.4 r.m.	pc	
NEVSKRPAINTA	2000	12	55	2 r.m.	6	12 r.m.	630	1260 r.m.	pc	
<b>Profiles</b>										
PGINCP(-)	2150	48	13	2.15 r.m.	1	2.15 r.m.	266	571.9 r.m.	pc	
NEINCPBASE1	2150	71	17	2.15 r.m.	1	2.15 r.m.	234	503.1 r.m.	pc	
NEINCPBASE2	2150	71	17	2.15 r.m.	1	2.15 r.m.	234	503.1 r.m.	pc	
NEINCPBASE6	2150	71	17	2.15 r.m.	1	2.15 r.m.	234	503.1 r.m.	pc	
NEINCPBASE4	2150	71	17	2.15 r.m.	1	2.15 r.m.	234	503.1 r.m.	pc	
NEINCPBASE5	2150	71	17	2.15 r.m.	1	2.15 r.m.	234	503.1 r.m.	pc	
NEINCPBASE8	2150	71	17	2.15 r.m.	1	2.15 r.m.	234	503.1 r.m.	pc	
PGPRSILV	1860	47	10	1.86 r.m.	1	1.86 r.m.	340	632.4 r.m.	pc	
PGENPSILVME270	2700	25	9.5	2.7 r.m.	10	27 r.m.	400	1080 r.m.	pc	
PGSTPSILVME270N	2700	23	27	2.7 r.m.	4	10.8 r.m.	120	324 r.m.	pc	
<b>Commercial range</b>										
PGEXPC(-)ME235	2350	50	9.5	2.35 r.m.	5	11.75 r.m.	225	528.75 r.m.	>30 pc	
PGEXPCNATURE	2350	50	9.5	2.35 r.m.	5	11.75 r.m.	225	528.75 r.m.	pc	
PGEXPCSILVME270	2700	45	3***	2.7 r.m.	10	27 r.m.	250	675 r.m.	pc	
PGENPCSILVME270	2700	17	1.5***	2.7 r.m.	20	54 r.m.	400	1080 r.m.	pc	
PGRPC80SILVME270	2700	80	11	2.7 r.m.	10	27 r.m.	300	810 r.m.	pc	
PGRPC55SILVME315A	3150	55	11.55	3.15 r.m.	10	31.5 r.m.	30	94.5 r.m.	pc	
PGRPC55CORNISILVMEA	200 x 200	55	11.55				4		pc	
PGRPC85SILVME315	3150	85	24	3.15 r.m.	5	15.75 r.m.	30	94.5 r.m.	pc	
PGRPC85CORNISILVME	200 x 200	85	24				4		pc	
PGDOORMATBROWN6	2000	3000	2	6 m²		6 m²			pc	
PGLAMCUT	700	280	230	1 pc		1 pc	32	32 pc	pc	
NEBENDPCSILVME270	2700	13.1	28	2.7 r.m.	10	27 r.m.	600		pc	
NEBTOOL	380	410	235	1 pc		1 pc	8		pc	
PGWTAPPINGBLOCK	520	110	62	1 pc		10 pc	480		pc	
PGWPULLBAR	700	280	230	1 pc		1 pc	120		pc	
<b>Underlays</b>										
PGUDLFOAM15B	15800	950	1.8	15 m²		12	180 m²	24	360 m²	roll
PGUDLSMART15	15000	1000	3	15 m²		9	135 m²	18	270 m²	pc
PGUDLSMARTPLUS15	15000	1000	3	15 m²		9	135 m²	18	270 m²	pc
PGUDLPS15	15790	950	2	15 m²		10	150 m²	20	300 m²	roll
PGUDLPS50	52640	950	2	50 m²		6	300 m²	6	300 m²	roll
PGUDLSW7	7000	1000	2	7 m²		20	140 m²	40	280 m²	roll
PGUDLSCREEN34	12500	2700	0.2	33.75 m²		60	2025 m²	60	2025 m²	roll
PGUDLMOI15	15000	1050	2.5	15 m²		15	225 m²	15	225 m²	roll
PGUDLFOAMPLUS15	15789	950	2	15 m²		10	150 m²	20	300 m²	roll
NETAPE50	5000	50	0.5	50 r.m.		24	1200 r.m.	1200	60.000 r.m.	pc

		Piece			Pack		Pallet		Ordering Unit	
		length mm	width mm	height mm	qty /pc**	pc /pack	qty /pack**	pc /pallet		qty /pallet**
PGUDLQH2	Quickheat, 2 m <sup>2</sup>	2000	1000	8	2 m <sup>2</sup>	1	2 m <sup>2</sup>	12	24 m <sup>2</sup>	roll
PGUDLQH3	Quickheat, 3 m <sup>2</sup>	3000	1000	8	3 m <sup>2</sup>	1	3 m <sup>2</sup>	12	36 m <sup>2</sup>	roll
PGUDLQH4	Quickheat, 4 m <sup>2</sup>	4000	1000	8	4 m <sup>2</sup>	1	4 m <sup>2</sup>	12	48 m <sup>2</sup>	roll
PGUDLQH5	Quickheat, 5 m <sup>2</sup>	5000	1000	8	5 m <sup>2</sup>	1	5 m <sup>2</sup>	12	60 m <sup>2</sup>	roll
PGUDLQH FILLER MAT	Filler mat	1000	0.245	8	0.245 m <sup>2</sup>	26	6.37 m <sup>2</sup>	12	2.94 m <sup>2</sup>	pack
PGUDLQH KITEU	Installation kit, wireless									pc
PGQHEXTCAB100	Extension cables, 1 m		1 r.m.			1	1 r.m.			pc
PGQHEXTCAB200	Extension cables, 2 m		2 r.m.			1	2 r.m.			pc
PGQHEXTCAB025	Extension cables, 0.25 m		0.25 r.m.			1	0.25 r.m.			pc

## Installation

PGTOOL	Installation kit	285	85	70			10		320		pc
PGSPACER	Extra spacers	190	85	50			28		896		pc
PGCLIPS15LM	Wallbase installation kit	185	90	60			10		320		pc
PGCLIPSKME95	Wallbase installation clips	394	139	59	50 clips	20	1000 clips	420	21.000		clips
PGCLIPSKME7080	Wallbase installation clips	394	139	59	50 clips	20	1000 clips	420	21.000		clips
NEPLUG	Connection plugs	150	100	40	24 plugs	10	240 plugs	1000	24.000		plugs
PGGLUE290	Multiglue	49	49	245	290 ml	12	3480 ml	1200			pc
PGSEAL500	Safeseal	240	65	65	500 ml	6	3000 ml	1080			pc
PGKIT(-)	Sealant	230	50	50	310 ml	6	1860 ml	756			pc
PGKIT TRANSP	Aqua Sealant, water resistant and transparent, 310ml	215	49		310 ml	12	3720 ml	1200			pc
NEFOAMSTRIP20	PE foam expansion joint filler 20 m	2000	10		20 r.m.		20 r.m.	125	2500 r.m.		pc
PGRCINOX15	Stainless steel radiator cover (2 pc/blister) 15 mm	15		1	2 pc	15	30 pc	1000			pc
PGRCINOX22	Stainless steel radiator cover (2 pc/blister) 22 mm	22		1	2 pc	15	30 pc	1000			pc
NETRACK	Wallbase installation track	2400	8	27	2.4 r.m	6	14.4 r.m.	918	2203.2 r.m.		pc

## Maintenance

PGCLEANKIT	Cleaning kit	760	200	50			10		150		pc
PGCLEANALL1000	All round floor cleaner	265	80	80	1000 ml	10	10 l	500			pc
PGREPAIR	Repair wax	290	125	28			12		648		pc

# cleaning instructions

## Ordinary cleaning

Damp-mop the floor, only when needed. Use Pergo All-round Floor Cleaner and Pergo mop cloth. Damp the mop cloth with warm water and Pergo All-round Floor Cleaner (mix 2 capfuls of Pergo All-round Floor Cleaner in 10 litre water). Mix carefully according to the manufacturer's instructions. Do not overuse. Used mop should be washed according to labelling in 60 °C without any additives. Do not work in larger areas than 15 – 20 m<sup>2</sup> at a time. Make sure the floor is dry after damp mopping.

## Heavily soiled or stained floors

To remove stubborn stains or markings use Pergo All-round Floor Cleaner and a clean mop, towel or a scratch free white or red pad if extra treatment is needed. Let it act for a few minutes. Remove the stain by wiping it away with a clean mop dampened with lukewarm water. Repeat if necessary. Wipe dry afterwards.

## Stain removal guide

**Locally spotted areas:** Apply Pergo All-round Floor Cleaner to the spot. Let the floor cleaner dissolve the stain for a few minutes. Remove the stain by wiping it away with a clean mop dampened with lukewarm water. Repeat if necessary.

**Chocolate, grease, juice, cordials, wine:** Spray with Pergo All-round Floor Cleaner or use warm water added with All-round Floor Cleaner.

**Tar, crayon, lipstick, shoe polish, ink, carbon, nail polish or cigarettes:** Methylated spirit, acetone or household solvent, petroleum spirit.

**Candle wax and chewing gum:** Allow to harden then carefully scrape off.

## Avoid wax and polish

A Pergo laminate floor should never be waxed or polished. Never scrub with steel wool or any other coarse material as this may have a negative effect on the appearance and structure.

## Additional treatments

Some textured surfaces require special treatment as described below:

**Matt textures:** Dirt will generally stick harder to floors with matt textures. We therefore recommend that these types of floors be cleaned more regularly.

**Polished textures:** Dried watermarks are often more visible on polished textures. Always wipe with a dry mop after damp cleaning.

**Floors with bevelled edges:** Because water can accumulate in the bevel, be sure to always wipe dry.

## Protect your floor

We recommend using wheels for hard floors on office chairs. Also protect the floor by using felt pads on furniture legs. Always use a doormat at the front entrance.

# Environmentally responsible, beautiful and long-lasting – that's Pergo durability



Pergo was the first laminate floor to be certified with the Nordic Ecolabel, the Green Swan. All Pergo laminate floors carry this label. An example of a good environmental product.



Pergo is also the first to receive the European Ecolabel for laminate flooring through our parent company Unilin. The EU Ecolabel is a label of environmental excellence that is awarded to products and services meeting high environmental standards throughout their life-cycle: from raw material extraction, to production, distribution and disposal.



PEFC stands for "Programme for the Endorsement of Forest Certification" and is the world's largest forest certification system. PEFC secure the way forests are managed. All Pergo floorings and skirting's have certified HDF.



\* Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).

This is by law mandatory in France from 2012-01-01 for new floorings introduced after this date. From 2013-09-01 it will also be mandatory for flooring products already on the market before 2012-01-01. A+ is the best and highest regulation. Pergo achieve already today A+ on all products and will gradually start to mark the products accordingly.





The Ü-symbol shows that the product fulfil the strong German regulation on VOC emissions for indoor use (Z-156.606-996).



This symbol shows that the product fulfil a Finnish voluntary specification for VOC. All Pergo floorings fulfil this norm and are marked.



An EPD® (Environmental Product Declaration) is a verified and registered document that communicates transparent and comparable information about the life-cycle environmental impact of products. The declaration number for Pergo laminate flooring is EPD-UNI-20170035-IBD1-EN.

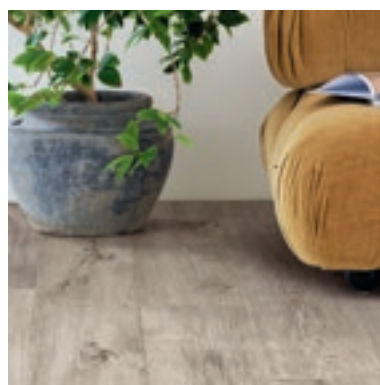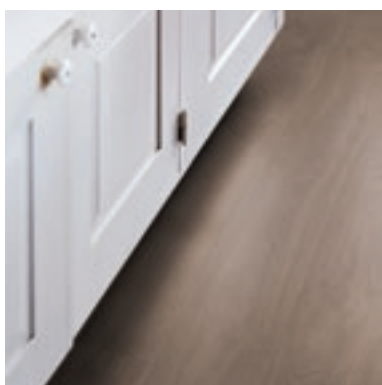

[pergo.com](http://pergo.com)

**PERGO**<sup>®</sup>

Pergo is a quality product produced by **UNILIN** bvba, division flooring, Ooigemstraat 3, 8710 Wielsbeke, Belgium.

